




# FRONT & REAR PROJECTION


## Cream (OP-100)

100 % PVC, Width: 140 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

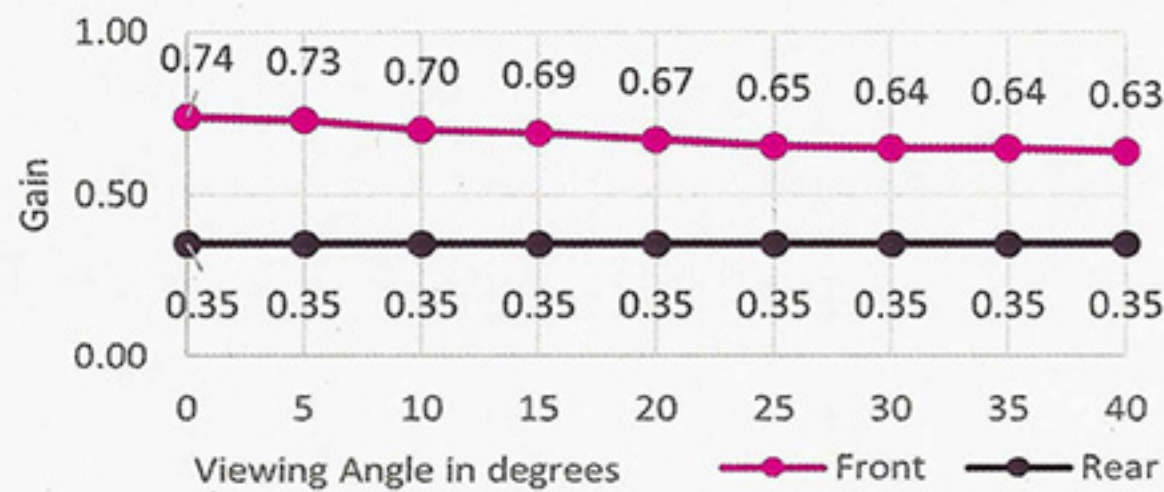



## Blue (OP-100)

100 % PVC, Width: 140 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

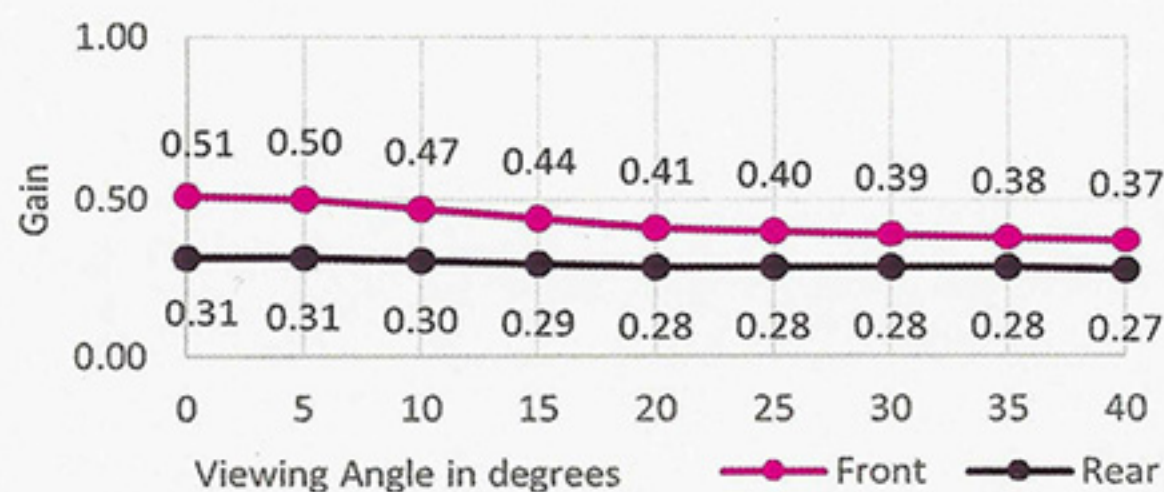


## Matt Translucent (RE-100)

100 % PVC, Width: 140 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

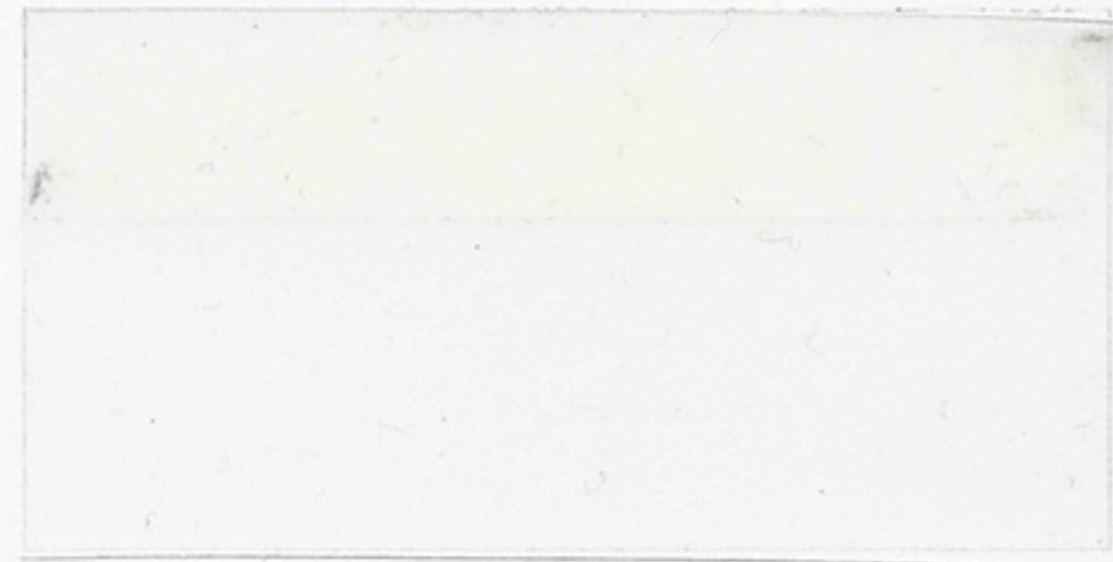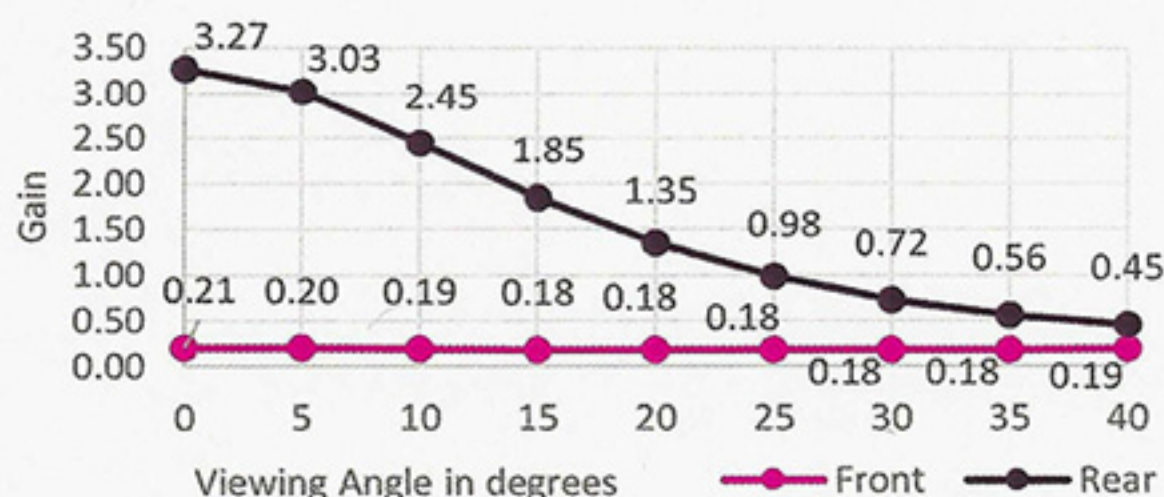


## Grey (ST-100)

100 % PVC, Width: 140 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

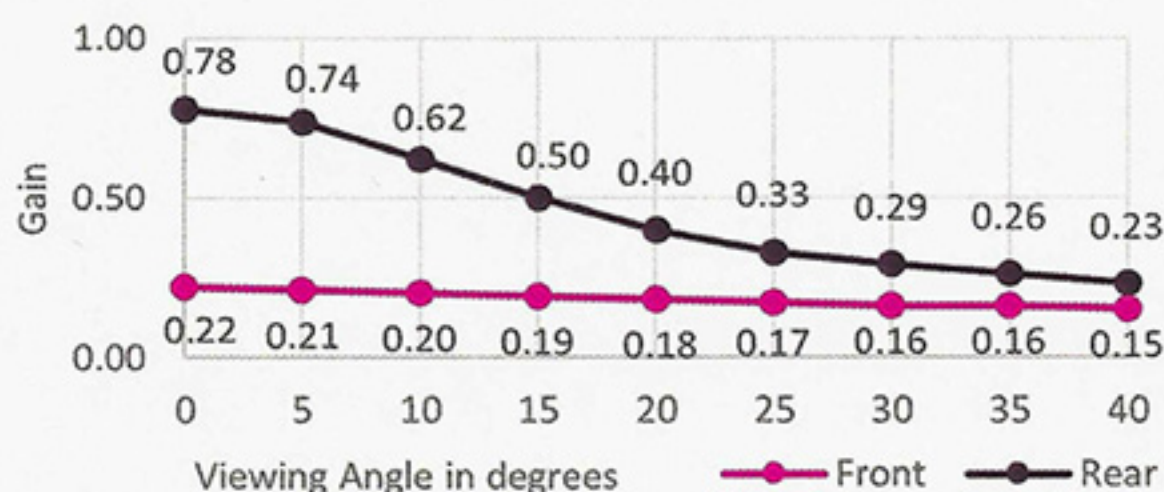


## Anthracite (SH-100)

100 % PVC, Width: 140 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

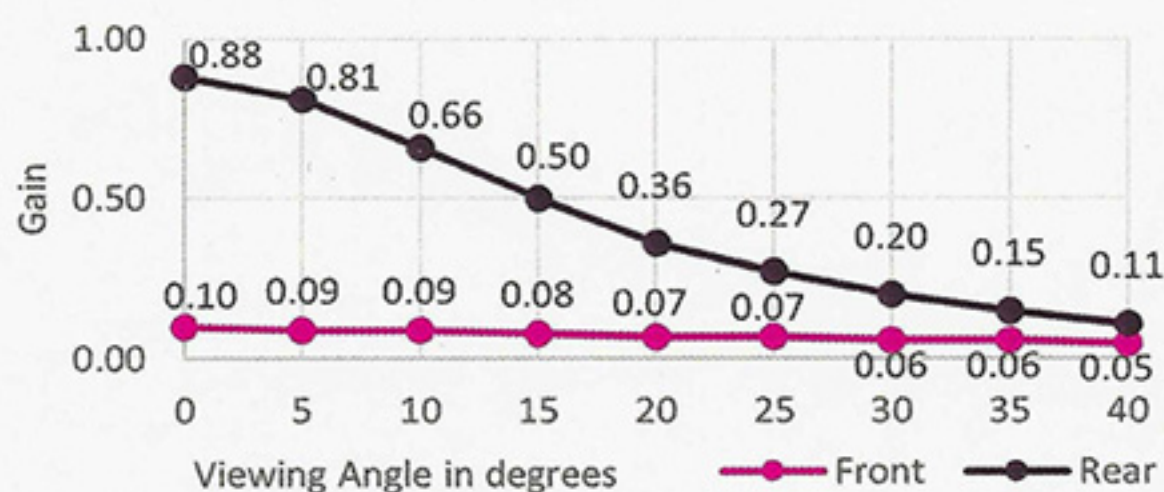



## Off-White (RP-200)

100 % PVC, Width: 240 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

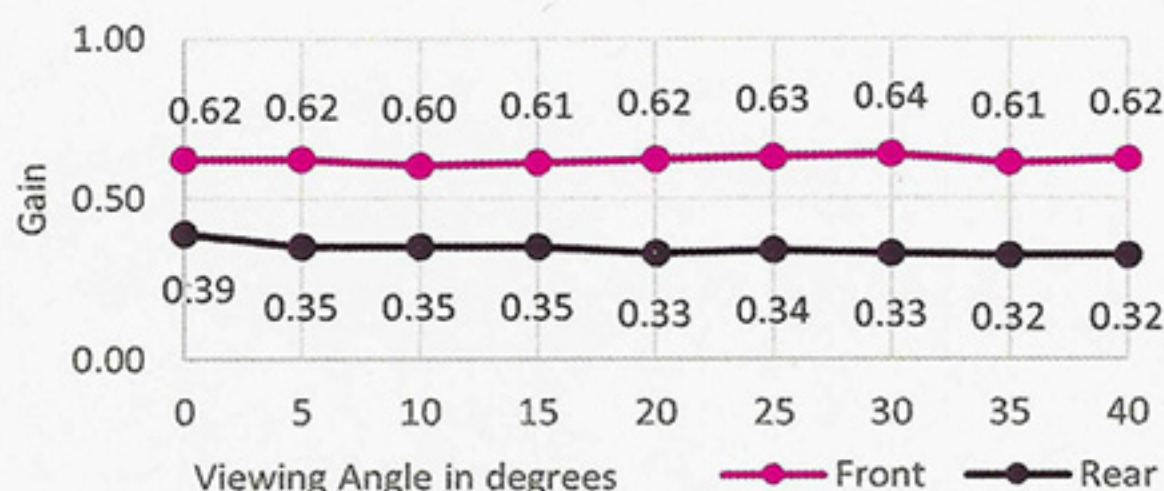

## Grey (RP-200)



100 % PVC, Width: 240 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front and Rear Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

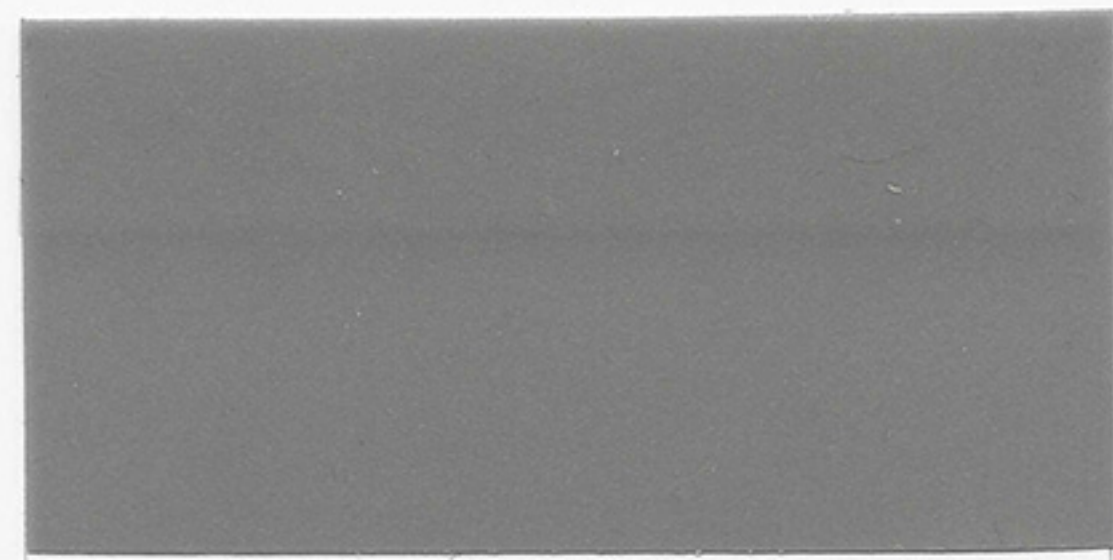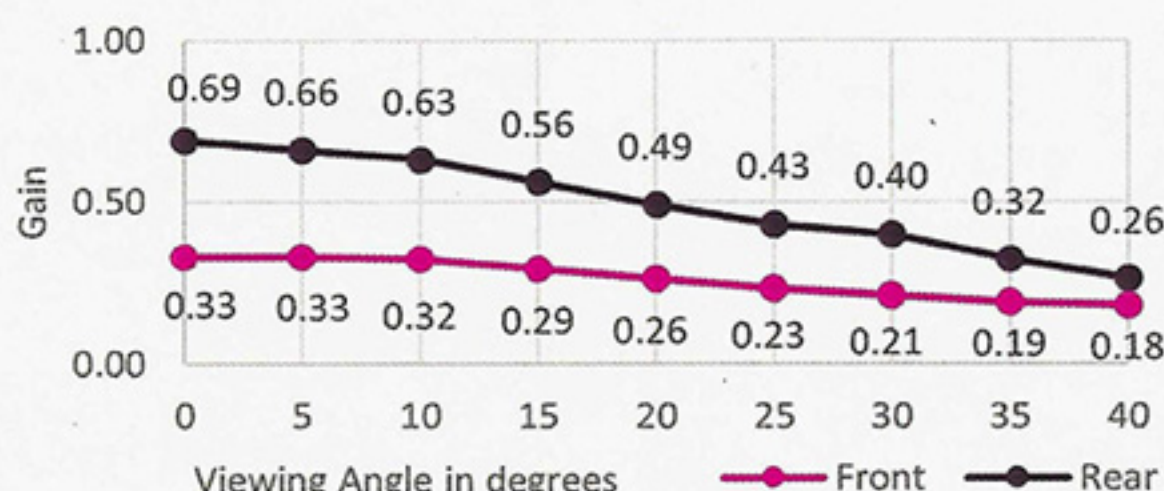





# FRONT PROJECTION



**White** (OP-100)  
 100 % PVC, Width: 140 cm.  
 Weight: 400 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

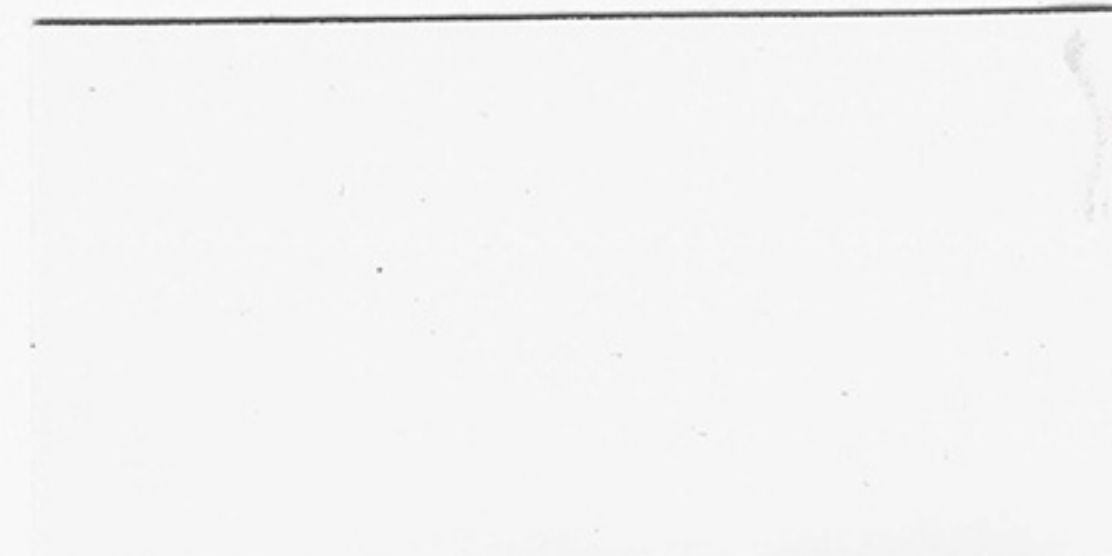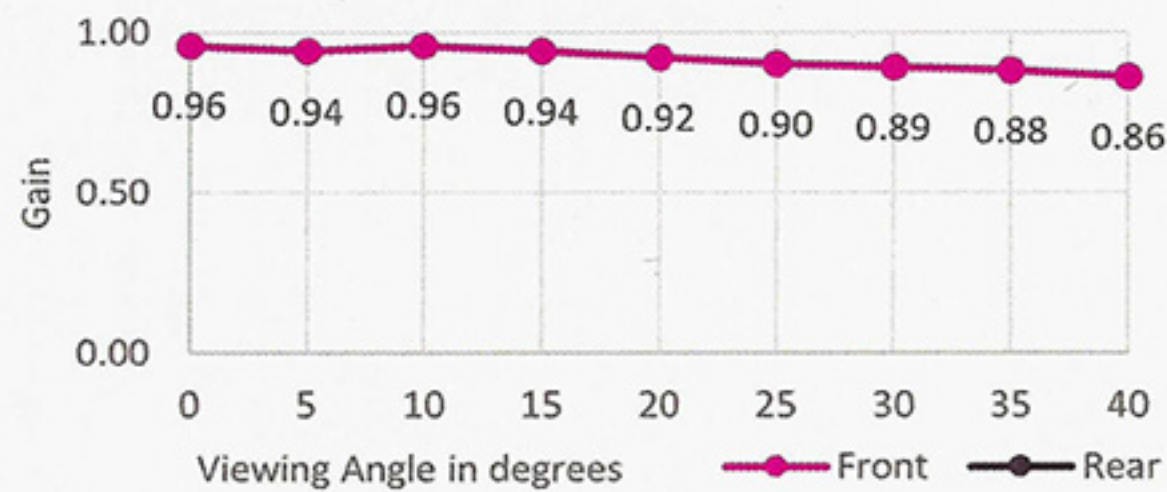



**White Perforated** (OP-100)  
 100 % PVC, Width: 140 cm.  
 Weight: 390 g/m<sup>2</sup>. Thickness: 300 μ.  
 Type : Front Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2, EN 13501-1 C s3, d0

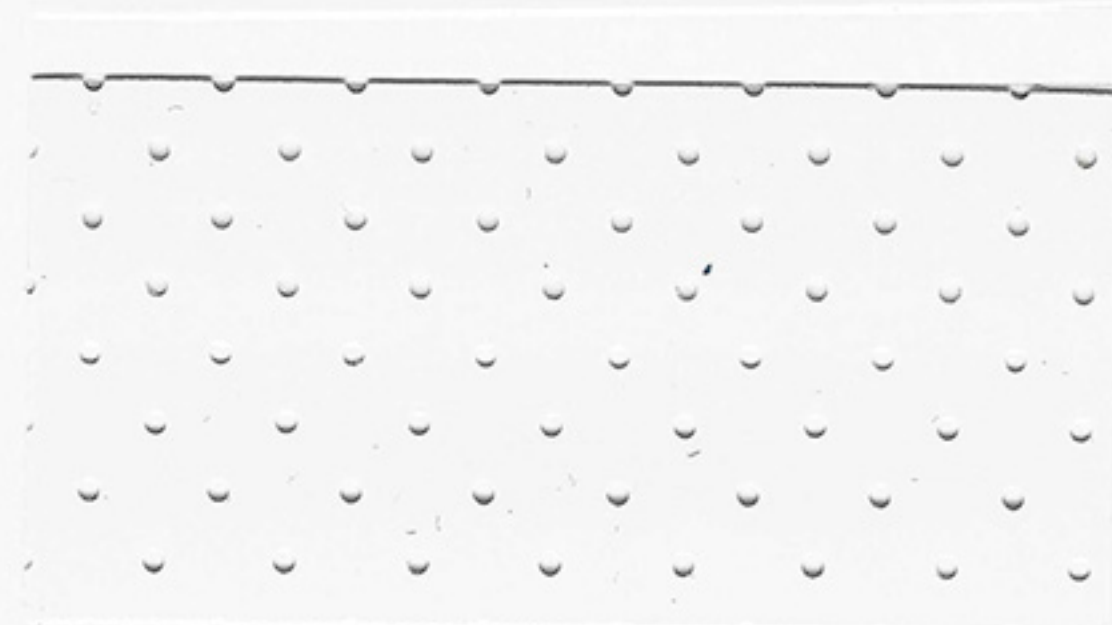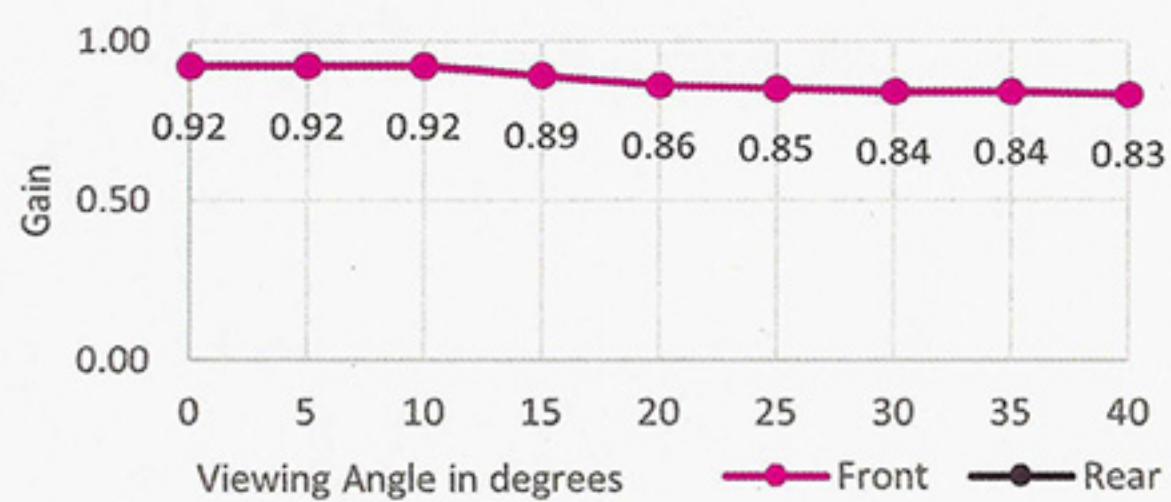

**White** (FP-200)  
 100 % PVC, Width: 240 cm.  
 Weight: 440 g/m<sup>2</sup>. Thickness: 320 μ.  
 Type : Front Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2.

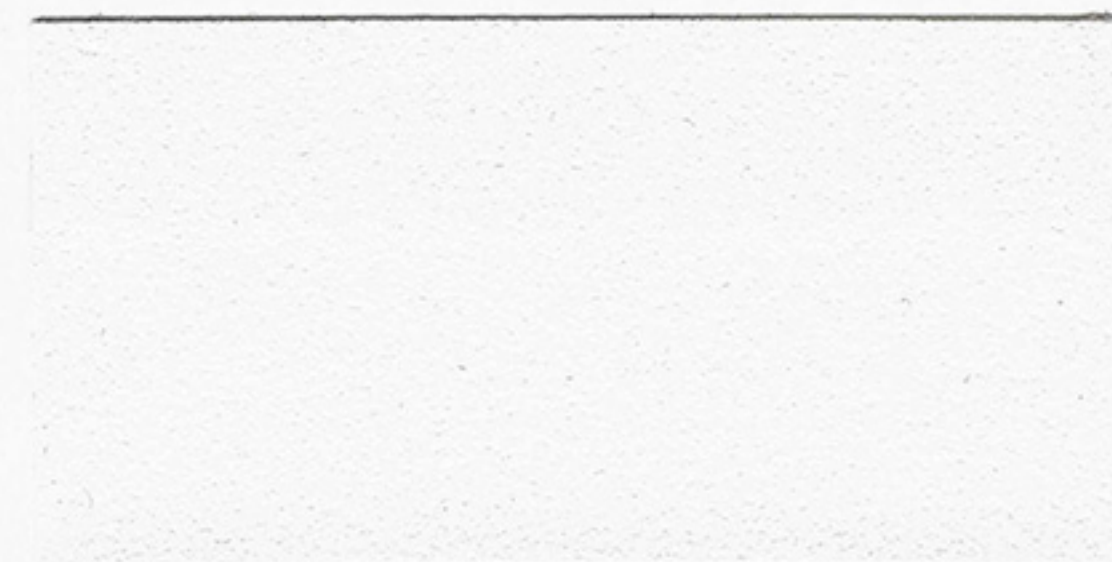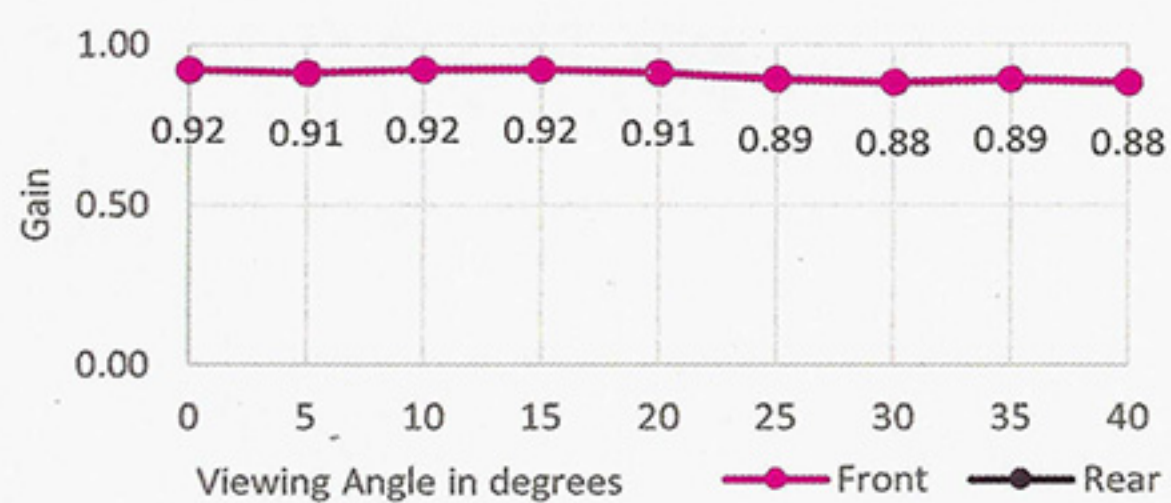


**Grey** (FP-200)  
 100 % PVC, Width: 240 cm.  
 Weight: 590 g/m<sup>2</sup>. Thickness: 390 μ.  
 Type : Front Projection  
 Inherently flame-retardant tested to  
 DIN 4102 B1, M2

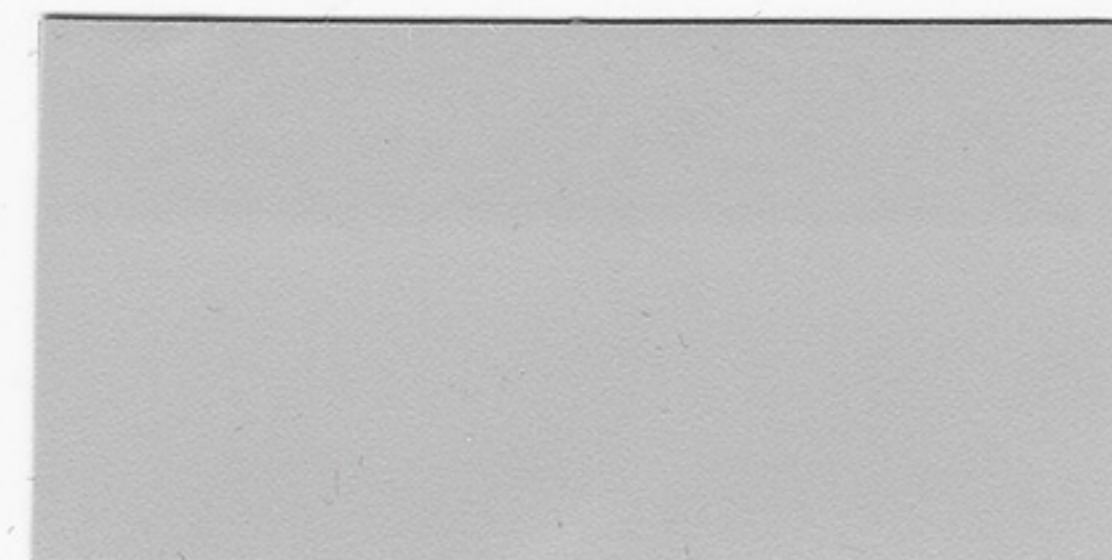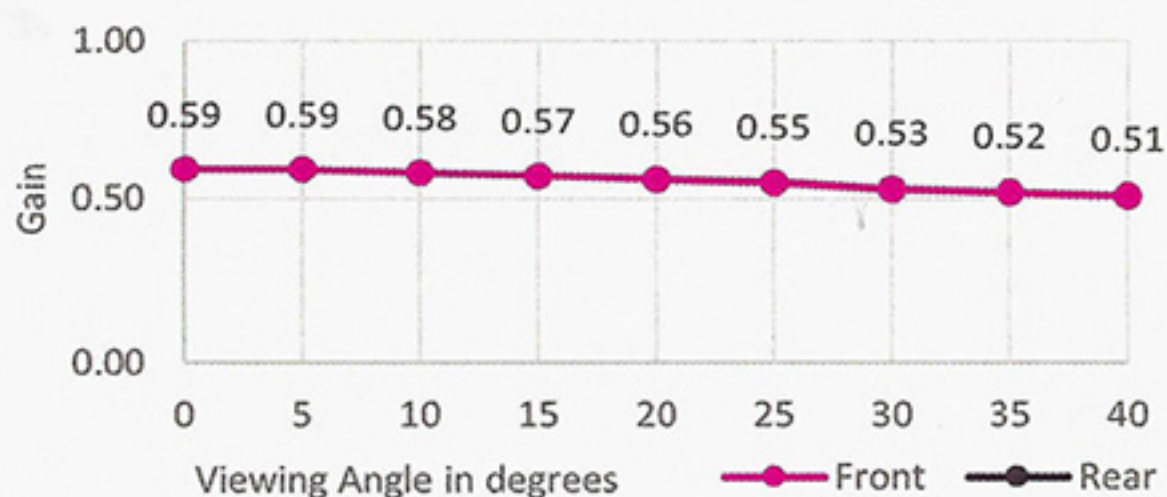


All PVC materials can be joined using special high-frequency welding, to create a nearly optically seamless projection.

## OTHER MATERIALS

**Diffusor** (DI-100 ICE)  
 100 % PVC, Width: 140 cm.  
 Weight: 380 g/m<sup>2</sup>. Thickness: 300 μ.  
 Inherently flame-retardant tested to DIN 4102 B1,  
 Special Welding on request only.

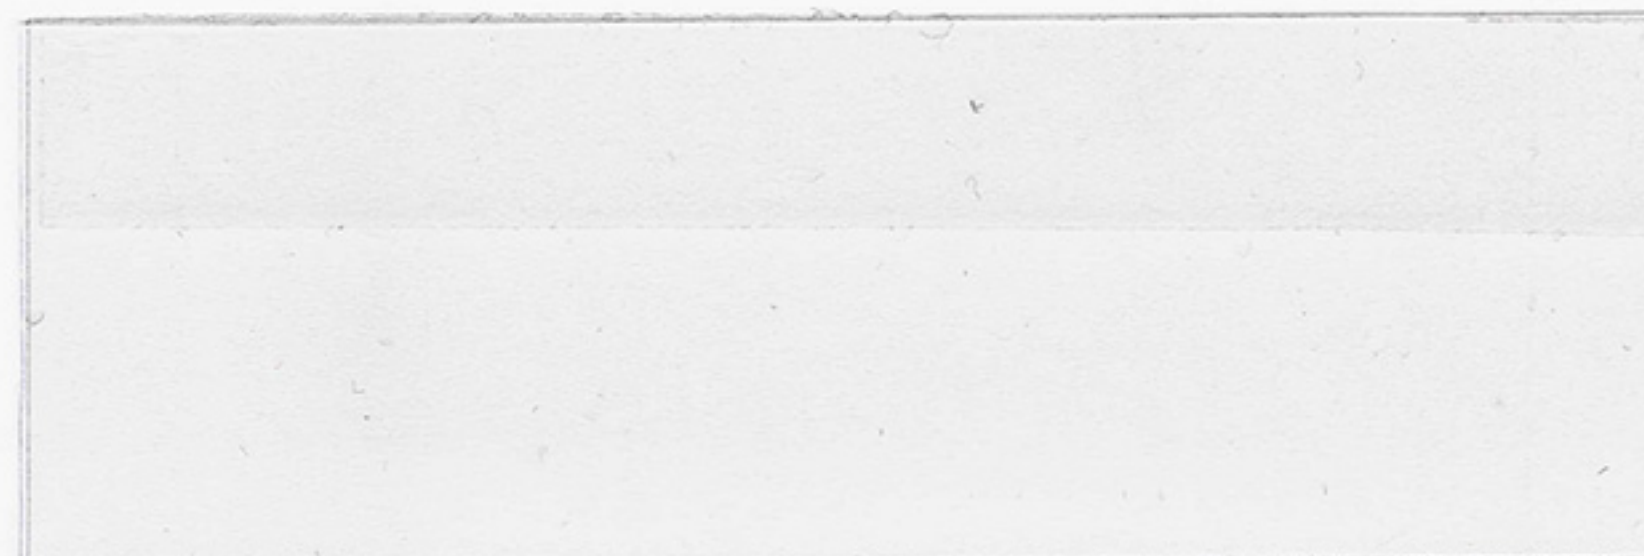

**Glassclear** (T 150 B1)  
 100 % PVC, Powdered. Width: 130 cm.  
 Thickness: 0.30 mm & 0.40 mm  
 Inherently flame-retardant tested to DIN 4102 B1,  
 Special Welding on request only.

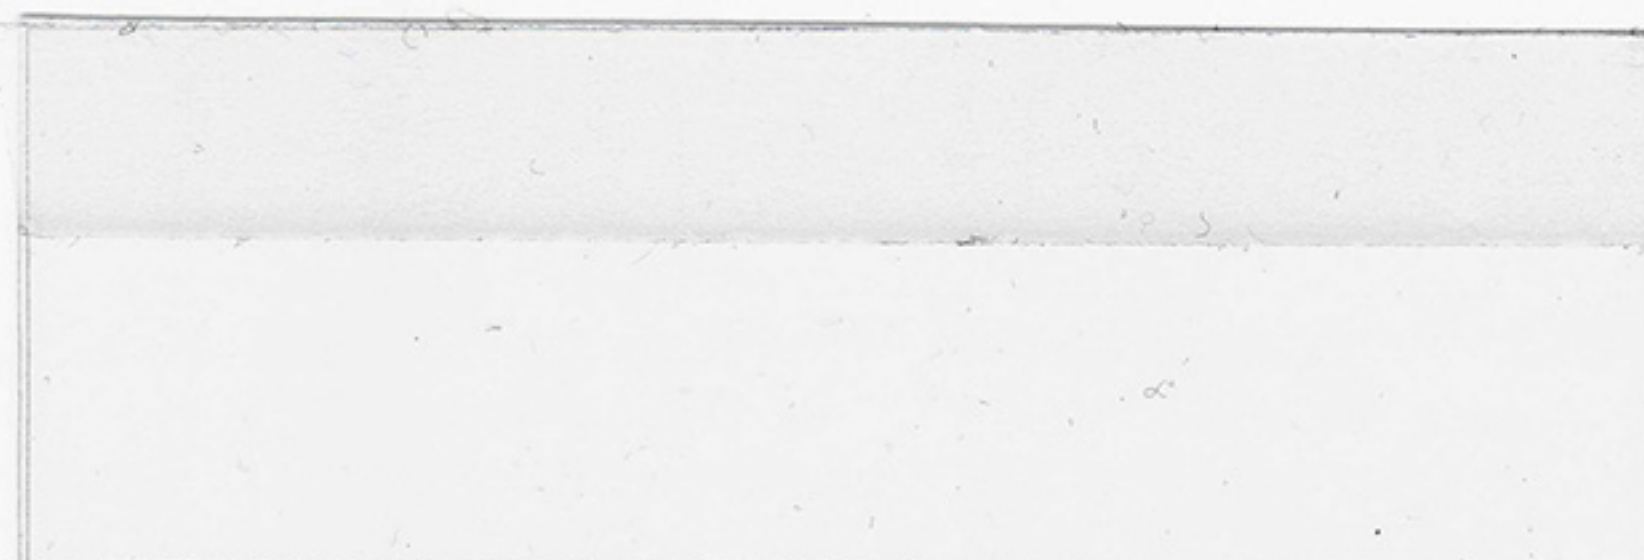

Sample colours are a representation only and may vary from the actual colour provided.